

DemaRock™ POWER, DURABILITY, SIMPLICITY AND RELIABILITY

FEATURES & BENEFITS


- Efficient gas and oil percussion system increases hitting power and reduces demand on the carrier's hydraulic system
- Compatible with wide range of operating pressure and oil flow
- Shock mounted housing reduces noise and minimizes vibration transmitted to the carrier
- Two moving parts and minimal components decreases maintenance costs
- 15 models ranging from 200 to 13,645 ft/lb impact energy class
- Fits all skid steer loaders, tractor-loader backhoes, mini through large excavators up to 60 tons

Compact range

- Building renovation
- Landscaping, gardening
- Trenching
- Demolition, non-reinforced concrete
- General construction works

Medium & Heavy-duty range

- Primary and secondary breaking in quarry
- Site preparation, foundation works
- Road construction
- Demolition works, highly reinforced concrete
- Trenching
- Tunnelling
- Bench levelling
- General construction works

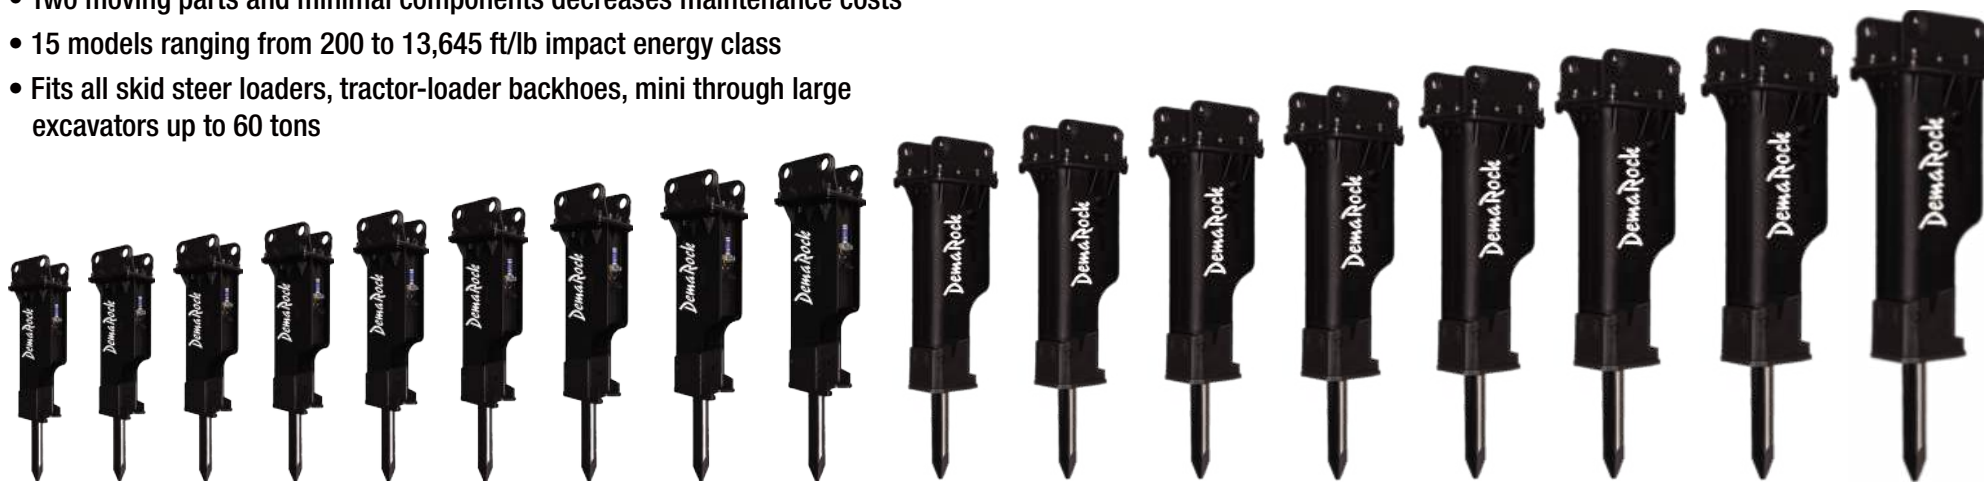

DESCRIPTION	MODEL	COMPACT RANGE			SKID STEER RANGE			MEDIUM RANGE				HEAVY-DUTY RANGE						
	UNIT	D40	D45	D53	D68	D75	D85	D100	D125	D135	D140	D155	D165	D175S	D185	D200	D210	D248
Impact Energy Class	ft/lbs	200	350	400	750	1,000	1,200	2,000	3,000	4,000	5,000	7,500	8,500	12,000	12,170	20,282	16,964	-
Operating Weight	lbs	225	284	397	796	994	1,616	2,220	3,023	4,255	4,511	6,543	6,559	8,602	10,582	13,153	15,432	24,251
	kg	102	129	180	361	451	733	1,007	1,371	1,930	2,046	2,968	2,975	3,902	4,800	5,966	7,000	11,000
Required Oil Flow	gal/min	4~7	5~8	6.6~13.2	10.5~18.5	13.1~23.6	15.8~26.3	21.1~29.1	23.7~31.7	38.3~47.6	31.7~47.6	47.6~63.4	52.8~65.6	52.8~68.42	58.08~71.28	75.4~88.6	79.4~100.5	118.9~132.1
	ℓ/min	15~25	20~30	25~50	40~70	50~90	60~100	80~110	90~120	145~180	120~180	180~240	200~250	200~260	220~270	285~335	300~380	450~500
Operating Pressure	psi	1,280~1,707	1,280~1,707	1,280~1,707	1,565~1,991	1,707~2,134	1,849~2,276	2,134~2,418	2,134~2,418	2,276~2,560	2,276~2,560	2,276~2,560	2,276~2,560	2,276~2,560	2,560~3,129	2,702~3,129	2,845~3,414	2,845~3,414
	kg/cm ²	90~120	90~120	90~120	110~140	120~150	130~160	150~170	150~170	160~180	160~180	160~180	160~180	160~180	180~220	190~220	200~240	200~240
Impact Rate	bpm	800~1,400	700~1,200	600~1,100	500~900	400~800	400~800	350~700	350~650	350~500	350~500	300~450	250~380	200~350	150~200	150~200	140~180	200~350
Hose Diameter	in	3/8, 1/2	3/8, 1/2	1/2	1/2	1/2	3/4	3/4	1	1	1	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/2
Tool Diameter	in	1.6	1.8	2.1	2.7	3.0	3.3	3.9	4.9	5.3	5.5	6.1	6.5	6.9	7.3	7.87	8.3	9.8
	mm	40	45	53	68	75	85	100	125	135	140	155	165	175	185	200	210	248
Applicable Carrier Weight	lbs	1,760~5,500	2,700~6,700	5,600~10,000	8,800~16,000	13,300~20,000	15,500~31,000	24,500~36,000	33,000~40,000	40,000~46,000	40,000~58,000	62,000~77,000	66,000~100,000	77,000~100,000	88,200~121,300	88,200~132,300	132,300~160,000	160,000~280,000
	ton	0.8~2.5	1.2~3.0	2.5~4.5	4~7	6~9	7~14	11~16	16~21	18~26	25~30	28~35	30~45	35~45	40~55	45~60	60~80	80~140
Noise Level	dB	105.5	106.8	108.5	108.7	114.5	112	113.5	115	120	118	123	124	125	-	-	-	-
Length	in	42	49	53	66	67	83	94	102	106	111	127	134	147	155	159	169	189
	mm	1086	1235	1344	1684	1706	2120	2387	2,682	2,813	3,063	3,392	3,475	3,812	3,945	4,034	4,288	4,800

sales@DemaRock.com

1-855-625-0941

DemaRock.com

